


Product Specification

Ord.-No.: **490 433 / E0683563**



Specification: Insulated stand-off, GRP, 650-1000 mm with mounting plate

Performance: Insulated stand-off, infinitely adjustable with mounting plate and clamping component for air-termination rod or down conductor.

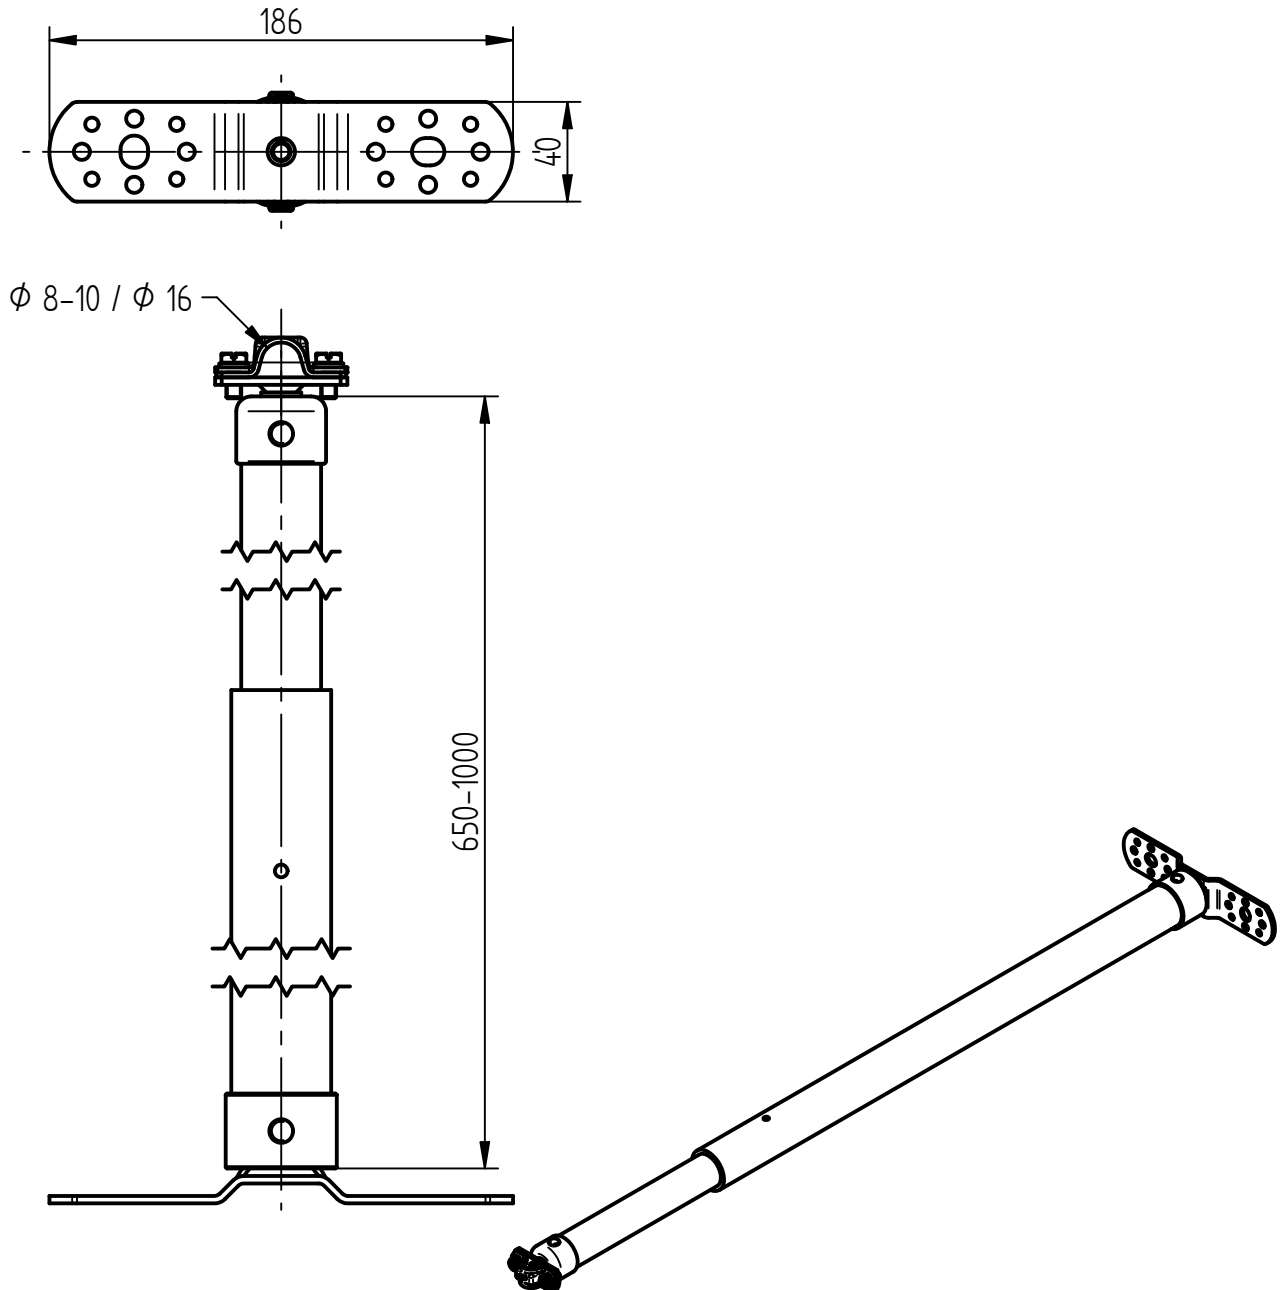

| | |
|--|---|
| Insulated stand-off | Glass fibre reinforced plastic (GRP), Ø 32/40 mm |
| Stand-off length | 650-1000 mm (adjustable) |
| ISO-length | 550-900 mm (adjustable) |
| Mounting plate | Stainless steel V2A |
| Mounting plate dimensions (length x width x thickness) | 185 x 40 x 3 mm |
| Hole pattern of mounting plate | [2x] elongated hole Ø 11 x 13 mm, [8x] Ø 6.5 mm, [8x] Ø 5.4 mm |
| Clamping component | Aluminium-stainless steel V2A, Ø 8-10 conductor connection/Ø 16 mm air-termination rod connection |
| Weight | ca. 1,3 kg |
| Standard reference | DIN IEC/TS 62561-8 |
| Packing unit | 1 unit |