


Product Specification

Ord.-No.: **912 502 / E0680594**

Specification: Air-termination rod-SET, V2A / Alu, 3.5m
with angle-base frame V2A



Performance: Air-termination rod-SET, height 3.5 m including angle-base frame.

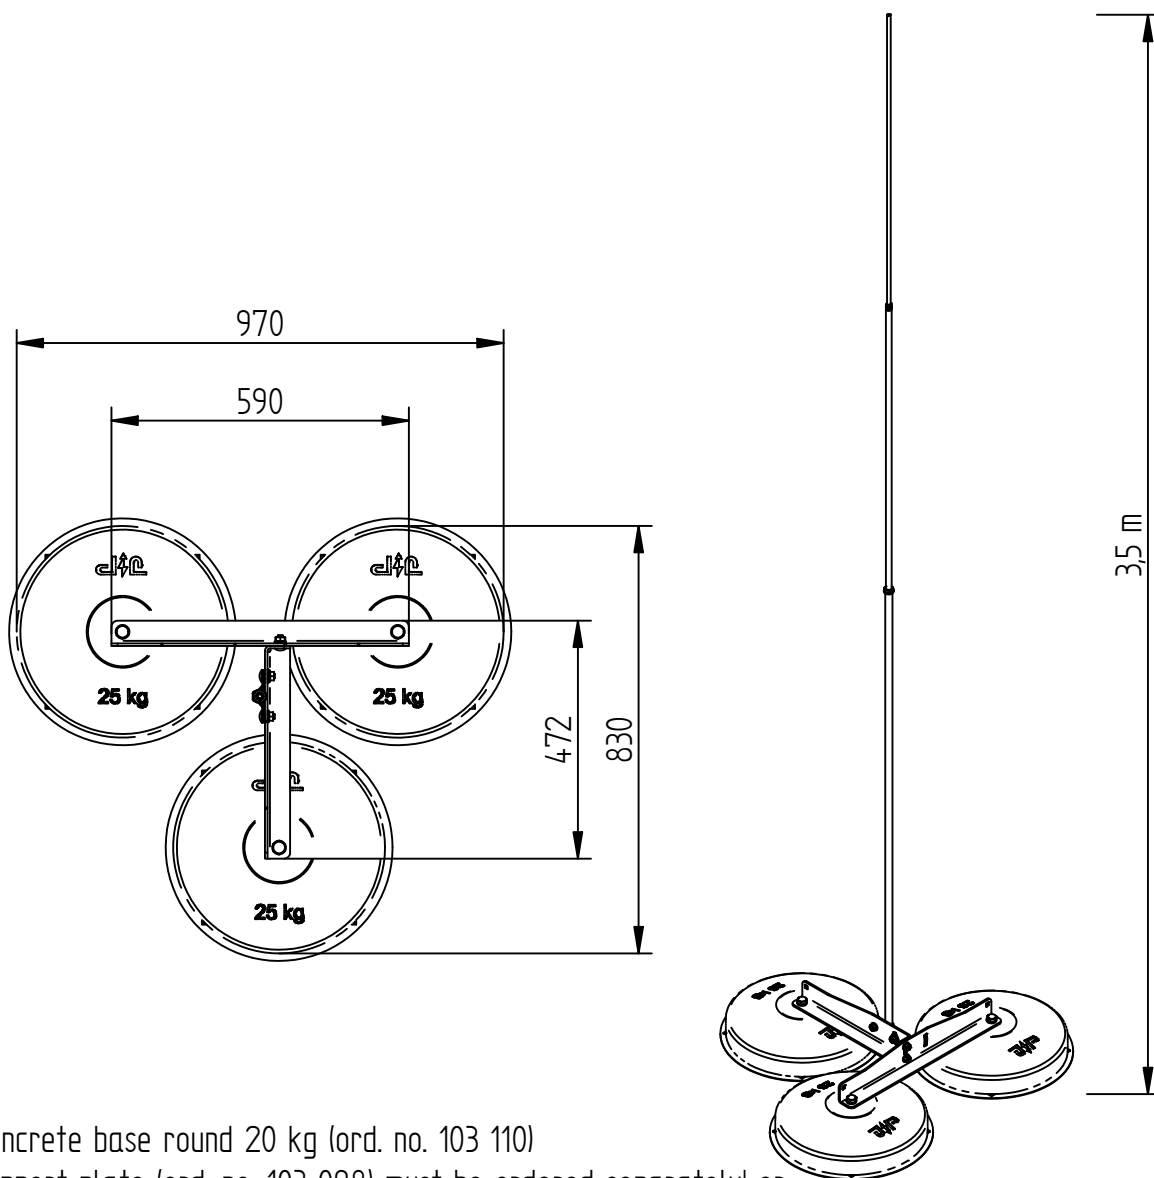

- (Zone 1) 3x concrete base round 20 kg (ord. no. 103 110)
and 3x support plate (ord. no. 103 098) must be ordered separately! or
(Zone 2) 3x concrete base round 25 kg (ord. no. 103 118)
and 3x support plate (ord. no. 103 102) must be ordered separately!

Air termination rod	Ø 20 mm, length 1500mm, stainless steel V2A Ø 16 mm, length 1000mm, aluminium Ø 10 mm, length 1000mm, aluminium
Angle-base frame	stainless steel V2A
Footprint	ca. 970 x 830 mm
Max. wind speed in wind zone 1 (Zone 1)	static safety factor for wind 1.0: 145 km/h static safety factor for wind 1.5: 120 km/h
Max. wind speed in wind zone 2 (Zone 2)	static safety factor for wind 1.0: 152 km/h static safety factor for wind 1.5: 124 km/h
Weight	ca. 7.6 kg
Standard reference	DIN EN 62561-2
Packing unit	1 unit