

Product Specification


Ord.-No.: **100 336 K / E0683578**

Specification: Strip, St/tZn, 30x3.5 mm, Z 500 PU 25 kg



Performance: Strip according to DIN EN 62561-2 for use in lightning protection systems or earth termination systems.

Profile:

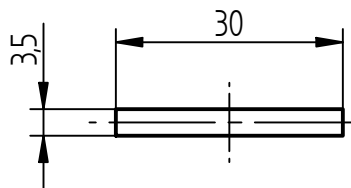

| | |
|--|---|
| Material | St/tZn, Z 500 |
| Galvanization | Minimum weight ~ 500 g/m ² Coating thickness ≥ 70 μm (Mean value) |
| Width | 30 mm |
| Thickness | 3,5 mm |
| Cross section | 105 mm ² |
| Short-circuit current (50 Hz), 1 s, ≤ 300 °C | 7,4 kA |
| Weight | 1 m = ca. 0,84 kg |
| Standard reference | DIN EN 62561-2 |
| Packing unit | 1 coil = ca. 25 kg |